

6003D 1/2" MALE SPRINKLER

Specification:

Connection Size: 1/2" male(3/4" available)

Working Pressure: 2.0-4.0bar

Shoot Distance: 8.5-12.0m

Flow Rate: 0.39-1.18m³/h


Features and Applications:

- Made by heavy duty polyformaldehyde material, stainless steel springs and axis
- Teflon o-ring ensure smooth rotating
- Removeable nozzle for easy maintance
- Designed for agricultural use in solid set, and landscape irrigation
- Available in with top cap or without cap
- Bottom thread can be 1/2" male or 3/4" male
- 12° low angle for under tree irrigation



Nozzle Diameter (mm)	Working Pressure (bar)	Flow Rate (m ³ /h)	Shoot Distance (m)
2.5 Purple	2.5	0.39	8.5
	3.0	0.43	9.0
	3.5	0.46	9.0
	4.0	0.49	9.0
2.8 Orange	2.5	0.50	9.5
	3.0	0.55	10.0
	3.5	0.59	10.5
	4.0	0.63	10.5
3.0 Green	2.5	0.56	9.5
	3.0	0.62	10.0
	3.5	0.67	10.5
	4.0	0.72	10.5
3.2 Red	2.5	0.67	9.5
	3.0	0.74	10.0
	3.5	0.79	10.5
	4.0	0.85	11.0
3.6 Brown	2.5	0.76	10.0
	3.0	0.83	10.5
	3.5	0.90	11.0
	4.0	0.97	11.5
3.8 Blue	2.5	0.76	10.0
	3.0	0.83	10.5
	3.5	0.90	11.0
	4.0	0.97	11.5
4.0 Black	2.5	0.95	10.5
	3.0	1.03	11.0
	3.5	1.11	11.5
	4.0	1.18	12.0

BOM list

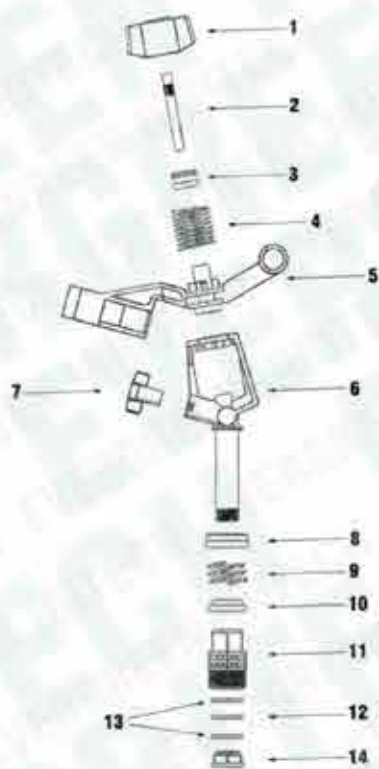

#	Material	Qty.	Size
1	POM	1	
2	SS	1	
3	POM	1	
4	SS	1	
5	POM	1	
6	POM	1	
7	POM	1	
8	POM	1	
9	SS	1	
10	ABS	1	
11	POM	1	1/2" / 3/4"
12	TEFLON	1	
13	RUBBER	2	
14	POM	1	

Related models



6003D SD



6003D SD-2



6003E(Anti-theft)

